

## GD-ML-CC2230HD

54.6 cm (21.5") LCD/TFT Monitor LED 16:9



- Designed for professional 24/7 usage
- Displays a full, flat 21,5" (54.6 cm) diagonal image
- LED Backpanel illumination
- Built-in Speaker
- 1 HDMI, 1 VGA Input



### ESSENTIAL

- Product Line Essential: high quality, basic features and remarkably many functions for smaller applications

## Specifications GD-ML-CC2230HD

### Display

LCD Panel size:	54.6 cm (21, 5") Diagonal AM-TFT LED Backlight
Pixels - Total:	1920 (H) x 1080 (V)
Pixel Pitch:	0.248 mm (H) x 0.248 mm (V)
Aspect Ratio:	16 : 9
Viewing Angle:	178° (H) ~ 178° (V)

### Video

Video Inputs:	1x HDMI, 1x VGA
Video Standard:	PAL, NTSC
Brightness:	250 cd, m <sup>2</sup>
Contrast Ratio:	1000:1
Number of Colours:	16.7 million
Response Time:	5 ms

### General

Speakers:	2 x 2 W
OSD (On Screen Display):	Yes, multi language
Accessories included:	Power Adapter and HDMI cable

### I/O Interface

Audio Inputs:	1-ch, RCA (2.0 Vp-p, 1kΩ)
---------------	---------------------------

### Approvals

Regulation:	CE, EAC, FCC, RoHS Compliant
MTBF at 25° C:	> 50,000 hours

### Environmental

Operating Temperature:	-10 °C ~ +50 °C (+14°F ~ + 122°F)
Humidity:	Less than 90%, non condensing

### Electrical

Supply Voltage:	12 VDC, Power Adapter 100 ~ 240 VAC 50, 60Hz included
Power Consumption:	20 W


### Mechanical

Material:	Robust Plastic
Vesa Mount:	100 x 100 mm
Dimensions:	508 x 306 x 43.3 mm
Weight:	3500 g (7,72 lb)

## Dimensions:

Item Code: GD-ML-CC2230HD

EAN CODE: 4260573063086

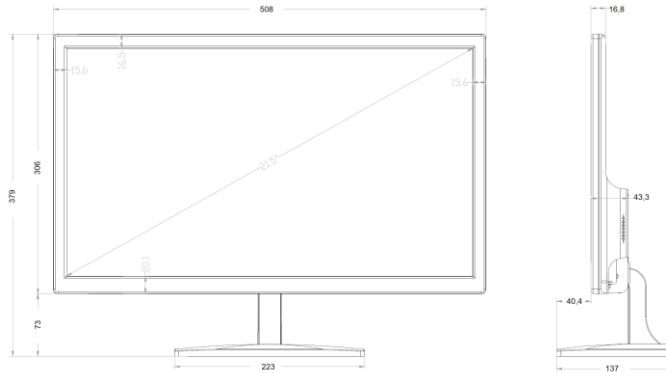

Item Code: GD-ML-CC2230HD

EAN CODE: 4260573063086

® Abetechs GmbH (Grundig Security), Düsseldorf, Germany

[grundig-security.com](http://grundig-security.com)