

# DH-IPC-HDBW71242E1-Z-X

## 12MP IR Dome WizMind Network Camera



ACUPICK

ePoE

WizMind X

Launched by Dahua Technology, Dahua WizMind is a full portfolio of solutions composed of project-oriented products including IPC, IVSS, NVR, PTZ, XVR, Thermal and software platform which adopts industry-leading deep learning algorithms. Focusing on customer's requirements, WizMind provides precise, reliable and comprehensive AI solutions for verticals.

### Series Overview

Driven by deep learning algorithms, Dahua WizMind X Series network camera supports various intelligent functions, meeting the requirements of a wide variety of scenes. The camera can accurately recognize people, motor vehicles and non-motor vehicles. It also supports face recognition, PPE detection, smart sound detection, privacy protection, ANPR, and parking space management. 2 intelligent functions can be enabled at the same time. The camera adopts advanced image processing AI ISP technology, has a high frame rate and the Deeplight night vision effect, and works with ultra-low streams. It is also dustproof, waterproof and vandal-proof, and is certified as IP67 and IK10 (the type of protection varies depending on the model).

### Functions

#### AI-ISP

With AI ISP technology, the camera is able to easily adapt to scenes, producing high quality images that reveal the fine details of targets.

#### Self-Learning

Empowered by deep learning technology, the device recognizes different types of targets and their statuses through learning and analyzing target features to detect targets and filter out false alarms.

#### AcuPick

This industry-leading search technology effectively utilizes both front-end and back-end intelligence to help with searching through massive video data to quickly and conveniently locate targets with greater precision.

#### Video Metadata

With deep learning algorithm, Dahua Video Metadata technology can detect, track, capture vehicle, non-motor vehicle and people, and select the best images, and extract attributes. The camera can count targets by directions (A>B, B>A, or A<B), and export the report.

- 12-MP 1/1.7" CMOS image sensor, low luminance, and high definition image.
- Outputs max. 12 MP (4000 × 3000)@25/30 fps.
- Built-in IR LED, and the max. illumination distance is 40 m.
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Two intelligent functions can be enabled at the same time, such as face recognition+people counting, face detection+people counting and PPE Detection+IVS.
- Sound Management: With its built-in dual MICs and Dahua noise reduction algorithms, the camera supports the sound management function, using it to collect vocals, adaptively reduce noise, and filter non-human voices.
- With deep learning algorithm, it supports: face recognition, face detection, IVS, people counting, video metadata, PPE Detection, parking space management and ANPR, etc.
- Built-in Hi-Fi large-diameter speaker covers an auditory range of 20 meters.
- Alarm: 3 in, 2 out; audio: 1 in, 1 out; RS-485, BNC; supports max. 1 TB Micro SD card.
- Built-in dual MICs; 1-ch speaker; support two-way talk.
- 12 VDC/24VAC/PoE+ (802.3at)/ePoE power supply, 12 VDC power output, max. current 165 mA and peak current is 700 mA, easy for installation.
- IP67 and IK10 protection, Anti-Corrosion coating (optional).
- EPTZ.



#### ANPR

With high-performance GPU chip, deep learning algorithm, and lots of sample training learning, Dahua ANPR technology can automatically collect and recognize the vehicle information, including license plate, logo, vehicle type, and vehicle color.

#### PPE Detection

With the PPE Detection function, the camera can detect attributes including workwear, hat, face mask, apron, gloves, shoe covers, boots, seatbelt, safety vest, and determine whether PPE requirements are met. Match attributes alarm or mismatch attributes alarm can be triggered according to the alarm settings.

## Protection (IP67, IK10, Wide Voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normally after soaking in 1 m deep water for 30 minutes.

IK10: The enclosure can stand the punch more than 5 times from a 5 kg hammer falling from a height of 40 cm (Impact energy is 20J).

Wide voltage: The camera allows  $\pm 30\%$  (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

## Technical Specification

### Camera

|                            |                                                                                            |
|----------------------------|--------------------------------------------------------------------------------------------|
| Image Sensor               | 1/1.7" CMOS                                                                                |
| Max. Resolution            | 4000 (H) $\times$ 3000 (V)                                                                 |
| ROM                        | 8 GB                                                                                       |
| RAM                        | 4 GB                                                                                       |
| Scanning System            | Progressive                                                                                |
| Electronic Shutter Speed   | Auto/Manual 1/3 s–1/100,000 s                                                              |
| Min. Illumination          | 0.0009 lux@F1.6 (Color, 30 IRE)<br>0.0005 lux@F1.6 (B/W, 30 IRE)<br>0 lux (Illuminator on) |
| S/N Ratio                  | >56 dB                                                                                     |
| Illumination Distance      | Up to 40 m (131.23 ft) (IR)                                                                |
| Illuminator On/Off Control | Auto                                                                                       |
| Illuminator Number         | 3 (IR LED)                                                                                 |
| Angle Adjustment           | Pan: 0°–355°<br>Tilt: 0°–80°<br>Rotation: 0°–355°                                          |

### Lens

|                      |                                                                                                                                                                                                                                                                                                                                                                                 |                                      |                       |                       |                      |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|-----------------------|-----------------------|----------------------|
| Lens Type            |                                                                                                                                                                                                                                                                                                                                                                                 | Motorized vari-focal                 |                       |                       |                      |
| Lens Mount           |                                                                                                                                                                                                                                                                                                                                                                                 | ϕ14                                  |                       |                       |                      |
| Focal Length         |                                                                                                                                                                                                                                                                                                                                                                                 | 2.7 mm–12 mm                         |                       |                       |                      |
| Max. Aperture        |                                                                                                                                                                                                                                                                                                                                                                                 | F1.6                                 |                       |                       |                      |
| Field of View        |                                                                                                                                                                                                                                                                                                                                                                                 | H: 106°–45°; V: 77°–34°; D: 140°–56° |                       |                       |                      |
| Iris Control         |                                                                                                                                                                                                                                                                                                                                                                                 | Auto                                 |                       |                       |                      |
| Iris Control Type    |                                                                                                                                                                                                                                                                                                                                                                                 | P-Iris                               |                       |                       |                      |
| Close Focus Distance |                                                                                                                                                                                                                                                                                                                                                                                 | 1.8 m (5.91 ft)                      |                       |                       |                      |
| DORI Distance        | Lens                                                                                                                                                                                                                                                                                                                                                                            | Detect                               | Observe               | Recognize             | Identify             |
|                      | W                                                                                                                                                                                                                                                                                                                                                                               | 87.6 m<br>(287.40 ft)                | 35 m<br>(114.83 ft)   | 17.5 m<br>(57.41 ft)  | 8.8 m<br>(28.87 ft)  |
|                      | T                                                                                                                                                                                                                                                                                                                                                                               | 186.6 m<br>(612.20 ft)               | 74.6 m<br>(244.75 ft) | 37.3 m<br>(122.38 ft) | 18.7 m<br>(61.35 ft) |
|                      | *DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool. |                                      |                       |                       |                      |
|                      |                                                                                                                                                                                                                                                                                                                                                                                 |                                      |                       |                       |                      |

## Smart Event

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IVS                        | Abandoned object; missing object                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Intelligence               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| EPTZ                       | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| IVS (Perimeter Protection) | Intrusion, tripwire, fast moving (the three functions support the classification and accurate detection of vehicle, animal and human); loitering detection, people gathering, parking detection. Supports long-distance mode. Supports self-learning, it filters out false alarms.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Face Detection             | Face detection; track; snapshot; snapshot optimization; optimal face snapshot upload; face enhancement; face exposure; face attributes extraction including 6 attributes and 8 expressions; face snapshot set as face or one-inch photo; snapshot strategies (real-time snapshot, quality priority and optimization snapshot); face angle filter; optimization time setting.                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Face Recognition           | There are two modes: General mode and counting mode.<br>General mode:<br>Face detection; snapshot; snapshot optimization; optimal face snapshot upload; face enhancement; face exposure; face attributes extraction including 6 attributes and 8 expressions; face snapshot set as face or one inch photo; snapshot strategies (recognition priority and optimization snapshot); face angle filter; optimization time setting.<br>Supports adding 5 group face databases; registering person one by one or in batches; setting face similarity; and supports face comparison with the face database containing up to 200,000 face pictures.<br>Counting mode:<br>Offers advanced customer counter, filters out specified faces from the face database, and exports reports both before and after removing duplicate faces. |
| PPE Detection              | Triggers alarms when the detected object matches or does not match all of the configured attributes (workwear, safety helmet, cap, face mask, apron, gloves, shoe covers, boots, safety vest, and seatbelt). Supports self-learning, it detects the different colors and styles of workwear.<br>Supports privacy protection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| People Counting            | Tripwire people counting, generating and exporting report (day/week/month/year); people counting in area and queue management, generating and exporting report (day/week/month); 4 rules can be set for tripwire people counting, people counting in area and queue management                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Heat Map                   | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| ANPR                       | ANPR: ANPR, track, priority, snapshot.<br>Vehicle attributes: License plate, vehicle type, vehicle color.<br>Other attributes: Seat belt, smoking, calling.<br>Support up to 10,000 blacklist records and 10,000 allowlist records. The camera can recognize plate numbers of vehicles moving at speeds of up to 60km/h.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Parking Space Management   | Parking Space Management: Manage outdoor and planned parking lots; manage parking spaces in multiple areas; display the total number of parking spaces and parking spaces that are available; trigger alarms based on a predefined number of vehicles.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Video Metadata | Motor vehicle, non-motor vehicle, face, and human body detection; snapshot; snapshot optimization; optimal face snapshot upload.<br>Motor vehicle attributes: License plate, vehicle type, vehicle color, vehicle logo, seatbelt, smoking, and calling. Generates flow statistics for people, motor vehicles and non-motor vehicles based on the direction, and exports reports.<br>Non-motor vehicle attributes: Type, vehicle color, number of people, top type and color, and hat.<br>Human body attributes: Top and bottom type and color, bag, hat, gender and umbrella. |
| Smart Search   | Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Acupick        | Uses deep learning algorithms and works with back-end devices to accurately match targets, such as people, animal, and motor vehicles, and search through live and recorded videos to quickly locate targets.                                                                                                                                                                                                                                                                                                                                                                 |

## Video

|                             |                                                                                                                                                                                                                                                                |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Video Compression           | H.265; H.264; H.264H; H.264B; MJPEG (Only supported by the sub stream)                                                                                                                                                                                         |
| Smart Codec                 | Smart H.265+; Smart H.264+                                                                                                                                                                                                                                     |
| Video Frame Rate            | Main stream: 4000 × 3000@(1–25/30 fps)<br>Sub stream: 1920 × 1080@(1–25/30 fps)<br>Third stream: 1920 × 1080@(1–25/30 fps)<br>Fourth stream: 1920 × 1080@(1–25/30 fps)<br>Fifth stream: 704 × 576@(1–25 fps)/704 × 480@(1–30 fps)                              |
| Stream Capability           | 5 streams                                                                                                                                                                                                                                                      |
| Resolution                  | 12M (4000 × 3000); 8M (3840 × 2160); 6M (3072 × 2048); 5M (3072 × 1728); 5M (2592 × 1944); 4M (2688 × 1520); 3M (2048 × 1536); 3M (2304 × 1296) 1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); CIF (352 × 288/352 × 240) |
| Bit Rate Control            | CBR/VBR                                                                                                                                                                                                                                                        |
| Video Bit Rate              | H.264: 32 kbps–16384 kbps<br>H.265: 32 kbps–12288 kbps                                                                                                                                                                                                         |
| Day/Night                   | Auto(ICR)/Color/B/W                                                                                                                                                                                                                                            |
| BLC                         | Yes                                                                                                                                                                                                                                                            |
| HLC                         | Yes                                                                                                                                                                                                                                                            |
| WDR                         | DWDR                                                                                                                                                                                                                                                           |
| Scene Self-adaptation (SSA) | Yes                                                                                                                                                                                                                                                            |
| White Balance               | Auto; natural; street lamp; outdoor; manual; regional custom                                                                                                                                                                                                   |
| Gain Control                | Auto                                                                                                                                                                                                                                                           |
| Noise Reduction             | 3D NR                                                                                                                                                                                                                                                          |
| Motion Detection            | OFF/ON (4 areas, rectangular)                                                                                                                                                                                                                                  |
| Region of Interest (RoI)    | Yes (4 areas)                                                                                                                                                                                                                                                  |
| Image Stabilization         | Electronic Image Stabilization (EIS)                                                                                                                                                                                                                           |
| Smart Illumination          | Yes                                                                                                                                                                                                                                                            |
| Defog                       | Yes                                                                                                                                                                                                                                                            |
| Image Rotation              | 0°/90°/180°/270° (Support 90°/270° with 2688 × 1520 resolution and lower)                                                                                                                                                                                      |

|                 |         |
|-----------------|---------|
| Mirror          | Yes     |
| Privacy Masking | 8 areas |
| LDC             | Yes     |

## Audio

|                   |                                    |
|-------------------|------------------------------------|
| Built-in MIC      | Dual MICs                          |
| Built-in Speaker  | Yes                                |
| Audio Compression | G.711a; G.711Mu; PCM; G.726; G.723 |

## Alarm

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Alarm Event | No SD card; SD card full; SD card error; network disconnection; IP conflict; illegal access; motion detection; video tampering; tripwire; intrusion; fast moving; abandoned object; missing object; loitering detection; people gathering; parking detection; parking space management; scene changing; audio detection; defocus detection; external alarm; face detection; face recognition; video metadata; ANPR; people counting in area; stay alarm; people counting; people number error detection; people stay detection; security exception |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Network

|                     |                                                                                                                                                                                          |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network Port        | RJ-45 (10/100/1000 Base-T)                                                                                                                                                               |
| SDK and API         | Yes                                                                                                                                                                                      |
| Network Protocol    | IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; SAMBA; PPPoE; SNMP; P2P; Auto Register             |
| Interoperability    | ONVIF (Profile S/Profile G/Profile T/ Profile M); CGI                                                                                                                                    |
| User/Host           | 20 (Total bandwidth: 340 M)                                                                                                                                                              |
| Storage             | FTP; SFTP; Micro SD card (support max. 1 TB); NAS                                                                                                                                        |
| Browser             | IE: IE11 and later<br>Chrome: Chrome 88.0.4324.190 and later<br>Firefox: Firefox 47.0.2 and later                                                                                        |
| Management Software | SmartPSS Lite; DSS; DMSS                                                                                                                                                                 |
| Mobile Client       | iOS; Android                                                                                                                                                                             |
| Security            | Digest; WSSE; Account lockout; Security logs; IP/MAC filtering; Generation and importing of X.509 certification; Syslog; HTTPS; 802.1x; Trusted boot; Trusted execution; Trusted upgrade |

## Certification

|                |                                                                                                                                                                           |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Certifications | CE-LVD: EN62368-1<br>CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU<br>FCC: 47 CFR FCC Part 15, Subpart B<br>UL/CUL: UL62368-1 & CAN/CSA C22.2 No. 62368-1-14 |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Port

|               |                                                               |
|---------------|---------------------------------------------------------------|
| RS-485        | 1 (baud rate range:1200 bps–115200 bps)                       |
| Audio Input   | 1 channel (RCA port)                                          |
| Audio Output  | 1 channel (RCA port)                                          |
| Alarm Input   | 3 channels in: wet contact, 5mA 3V–5V DC                      |
| Alarm Output  | 2 channels out: dry contact, 1,000mA 30V DC/500mA 50V AC      |
| Analog Output | 1 channel (CVBS output: BNC)                                  |
| Power Output  | 12 VDC power output, max. current 165 mA, peak current 700 mA |

## Power

|                   |                                                                                                                                                                                               |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Supply      | 12 VDC/24 VAC/PoE+ (802.3at)/ePoE                                                                                                                                                             |
| Power Consumption | Basic: 6.6 W (12 VDC); 9.3 W (24 VAC); 9.8 W (PoE) Max. (ICR switch + IR intensity+ zoom): 18.7 W (12 VDC); 24.8 W (24 VAC); 25.2 W (PoE) Heating: 3 W (12 VDC); 4.6 W (24 VAC); 5.47 W (PoE) |

## Environment

|                       |                                                  |
|-----------------------|--------------------------------------------------|
| Operating Temperature | −40 °C to +65 °C (−40 °F to +149 °F)             |
| Operating Humidity    | ≤95%                                             |
| Storage Temperature   | −40 °C to +65 °C (−40 °F to +149 °F)             |
| Storage Humidity      | 10–95%                                           |
| Protection            | IP67; IK10; Anti-Corrosion Protection (optional) |

## Structure

|                    |                                       |
|--------------------|---------------------------------------|
| Casing Material    | Metal + plastic                       |
| Product Dimensions | 118.0 mm × Φ159.0 mm (4.65" × Φ6.26") |
| Net Weight         | 1.16 kg (2.56 lb)                     |
| Gross Weight       | 1.36 kg (3.00 lb)                     |

## Ordering Information

| Type                   | Model                  | Description                         |
|------------------------|------------------------|-------------------------------------|
| 12MP Camera            | DH-IPC-HDBW71242E1-Z-X | 12MP IR Dome WizMind Network Camera |
|                        | IPC-HDBW71242E1-Z-X    | 12MP IR Dome WizMind Network Camera |
| Accessories (Optional) | PFB211W                | Wall Mount Bracket                  |
|                        | PFA156                 | Pole Mount Bracket                  |
|                        | PFA101                 | Mount Adapter                       |
|                        | PFB300C                | Ceiling Mount Bracket               |
|                        | PFB5201C               | In-ceiling Mount Bracket            |
|                        | PFA138                 | Junction Box                        |
|                        | PFM320D                | 12 VDC 2 A Power Adapter            |
|                        | PFM900-E               | Integrated Mount Tester             |
|                        | TF-P100                | MicroSD Memory Card                 |

## Accessories

Optional:



PFB211W  
Wall Mount Bracket



PFA156  
Pole Mount Bracket



PFA101  
Mount Adapter



PFB300C  
Ceiling Mount Bracket



PFB5201C  
In-ceiling Mount Bracket



PFA138  
Junction Box




PFM320D  
12 VDC 2A Power  
Adapter



PFM900-E  
Integrated Mount Tester



TF-P100  
MicroSD Memory Card

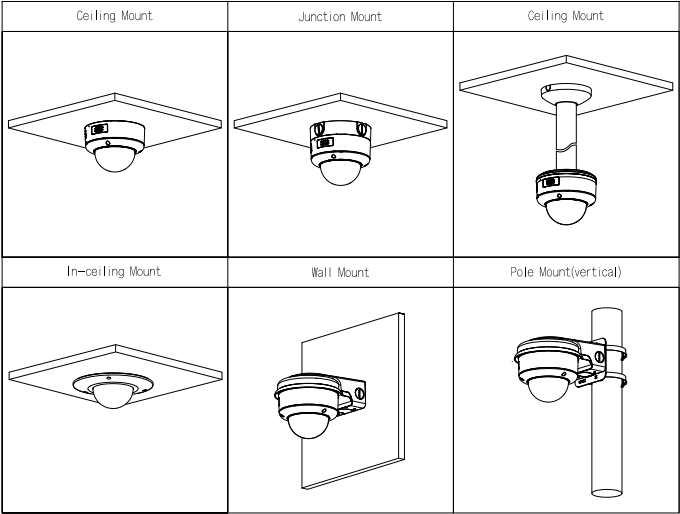

Dimensions (mm[inch])

