

11" - 26"



54.6 cm (21.5") LCD/TFT Monitor LED Backlight

- Full-HD TFT-LCD monitor
- High Contrast Ratio
- Built-in Speaker
- Superior image quality DNIe (Digital Natural Image engine)
- Durable tempered glass screen
- 120HZ processing smooth judder in motion
- Remote-Control (Infrared) included




SPECIFICATIONS

LCD Panel size	21,5" Diagonal AM-TFT LED Backlight
Resolution	1920 x 1080 pixel @ 120Hz
Resolution	600 (H) lines
Video Standard	PAL/NTSC
Video Inputs	2 CH Composite, BNC, Looped 1 HDMI, 1 CH VGA
Audio Inputs	2 CH, Cinch, Line Level, Stereo
Brightness	250 cd/m ²
Contrast ratio	1000:1
Number of Colours	16.7 million
Viewing Angle	170°(H) ~ 160°(V)
Response Time	5 ms
Screen Mode	16:9
Speaker Output	1 W x2
Operating Temperature	0°C ~ +40°C
Humidity	20 ~ 90%RH
Display protection	Tempered Glass
Suitable for	VESA DPM compatible
Supply Voltage	100 ~ 240 VAC, 50/60Hz
Power Consumption	35 W
Weight	5kg kg
Dimensions w*h*d	515 x 316 x 59.9 mm

11" - 26"



DIMENSIONS

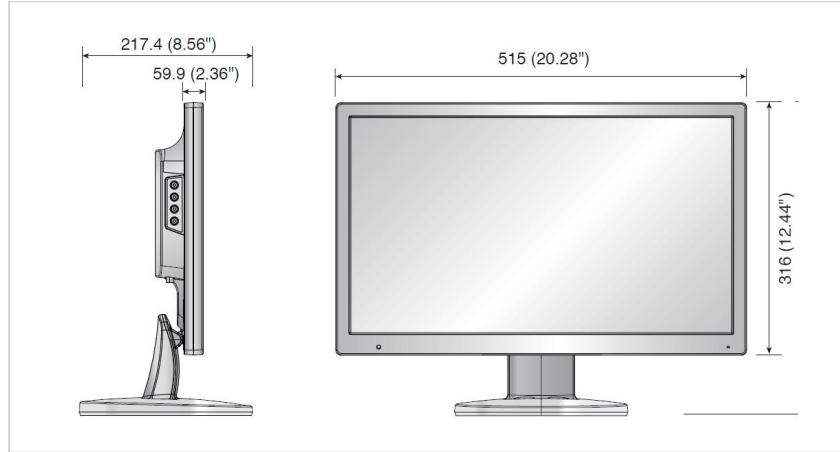

FRONT & REAR VIEW



11" - 26"



Informations

21.5" LED Monitor
SMT-2232

21.5"	1920x1080 Resolution	1000:1 High Contrast Ratio	5ms Response Time	Built-in Speakers
-------	-------------------------	-------------------------------	----------------------	-------------------



Informations

